
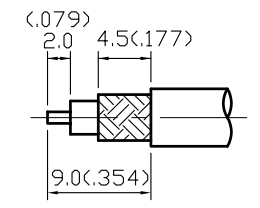



NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

15	NUT II	BRASS	1	SILVER 70μ" MIN.
14	WASHER	BRASS	1	SILVER 70μ" MIN.
13	GASKET	SILICONE	1	RED
12	BRAID CLAMP	BRASS	1	SILVER 70μ" MIN.
11	CHASSIS	BRASS	1	SILVER 70μ" MIN.
10	NUT I	BRASS	1	SILVER 70μ" MIN.
9	BODY II	BRASS	1	SILVER 70μ" MIN.
8	CENTER CONTACT	BRASS	1	SILVER 70μ" MIN.
7	BODY I	BRASS	1	SILVER 70μ" MIN.
6	WASHER	BRASS	1	SILVER 70μ" MIN.
5	SPRING WASHER	SK-5	1	NICKEL 100μ" MIN.
4	WASHER	BRASS	1	NICKEL 100μ" MIN.
3	GASKET	SILICONE	1	RED
2	INSULATION	TEFLON	1	NONE
1	SHELL	BRASS	1	SILVER 70μ" MIN.
NO	DESCRIPTION	MATERIAL	Q' TY	FINISH

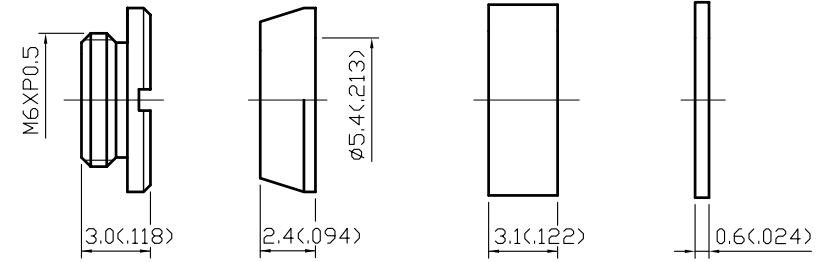

STRIPPING DIMENSION

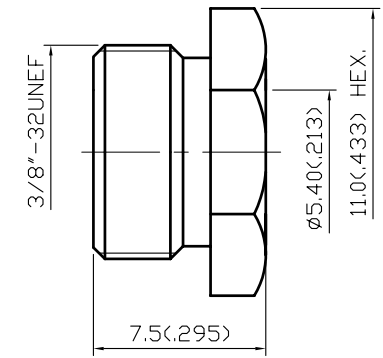

APPROVED by _____ DATE: _____

DESCRIPTION		BNC RIGHT ANGLE PLUG CLAMP			
製圖	DRAWN	TOLERANCE	品名		DATE
	Elvis		.X	±0.2	
檢圖	CHECK	單位	TITLE		日期
	Monica		.XX	±0.1	
認定	APPROVAL	比例	DWG.NO.		版次
	Monica		.XXX	±0.05	
		SCALE		REV.	
		4:1		A-2	
佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.					