



**Palstar Incorporated**  
9676 N. Looney Rd.,  
Piqua, OH 45356 USA  
**Customer Service and Sales Telephone:**  
1-800-773-7931  
**Fax:**  
1-937-773-8003  
**Email:**  
info@palstar.com



## *DL2K 2000 Watt Dummy Load*

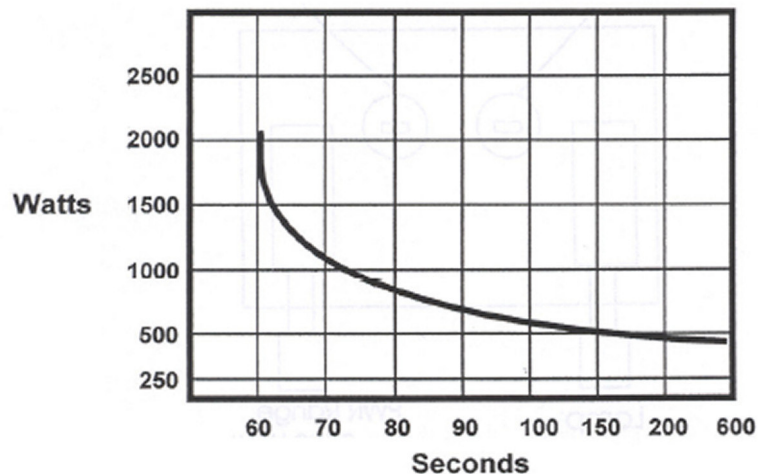
---

# *Owner's Manual*



**SPECIFICATIONS**

IMPEDANCE	56Ω +0/-10%
SWR	<1.3 DC—30 Mhz
POWER DISSIPATION	SEE CHART BELOW
RATING/FREQUENCY:	DC—30 Mhz 2500 w Single tone CW — 1 Minute Max. (Fan on.)

**Power Capability**

The Palstar DL2K dummy load utilizes solid ceramic resistive elements that are non-inductive and very resistant to overload and high temperature operation.

A switchable fan cooling system allows the load to dissipate high loads safely. Although the meter reads a maximum of 5000 watts (500 x 10), the maximum rated dissipation is 2500 watts for up to 1 minute with the fan on (see Power Capability chart).